



PRODUCT GUIDE

ISN'T IT TIME FOR A BETTER LOCKER? BETTER HINGE? BETTER WARRANTY? BETTER LATCHING? BETTER SERVICE? BETTER PRICE?

OUR COMPANY







Nobody else in the industry offers a locker with our locker comes with a Lifetime Warranty. Remember, our whole business is lockers. Our Single, Double and Triple-Tier lockers come with a full length piano standard equipment, not expensive upgrades. Why? Research has determined that nearly every locker latch. With this in mind, we fortified these vulnerable areas and created an affordable standard locker that of maintenance.

high volume storage for a variety of commercial, locker, a Single-Tier locker gives students the space uniforms and street clothes. Our standard full-length duty storage you can count on.

a coat hanger? Buy 18" deep lockers.



We are a nationwide supplier of premium metal lockers for educational, industrial and institutional needs. Our selection of lockers covers the full breadth of styles, colors, sizes and gauges. Enclosed herein please find some of our most popular offerings.

QUALITY DETAILS

DOUBLE-TIER





DOUBLE-TIER LOCKERS

The most popular locker by far. Double-Tier lockers are the smart choice for those in need of roomy storage in a smaller footprint. The double-tier design coupled with our heavy duty latch and hinge system combine durability and economy for the ultimate versatile storage. Schools and businesses across the country have made this locker a perennial favorite.

LOCKER BUYING TIP: Need lots of lockers but restricted by budget? A Double-Tier locker doubles your buying power!

SIX-TIER LOCKERS

Short on space but not on people? Consider the Six-Tier, a master of efficiency. Perfect for break rooms, locker rooms or anywhere else where you need a secure place to store smaller items like books, lunchboxes, shoes, laptops or hardhats. With two hinges per door and a lockable latch pull, this locker is big on quality, not floor space.

LOCKER BUYING TIP: Have you considered buying USED lockers? We stock hundreds of used lockers in many styles and sizes. We might have just what you're looking for.

TRIPLE-TIER



TRIPLE-TIER LOCKERS


The space-efficient design of Triple-Tier lockers makes them ideal for the storage of small to medium sized items. That often means clothes, book bags, purses, lunchboxes, hardhats and all other equipment commonly kept in gym lockers, sports lockers or employee lockers. Our selection of triple-tier lockers features the most popular sizes and, as always, comes with the famous Lightning Locker full-length piano hinge and all-welded latch system for years of maintenance free service.


LOCKER BUYING TIP: Want bigger lockers for less money? Deeper lockers cost less than wider lockers.

ATHLETIC LOCKERS

This is the ultimate athletic locker for rugged durability and big-shoulder roominess. This locker comes with a variety of add-on options including a lockable security box and foot locker (which conveniently doubles as a usable bench for team meetings.) This heavy duty athletic locker also features full diamond perforated steel on the sides and a wide open front allows maximum ventilation so your locker room won't smell like... well, a locker room.

Our heavy duty athletic lockers are available in a variety of colors, widths and heights. Whether you are outfitting a new school gym, locker room or a chain of athletic facilities, Lightning Lockers has the athletic lockers you need.

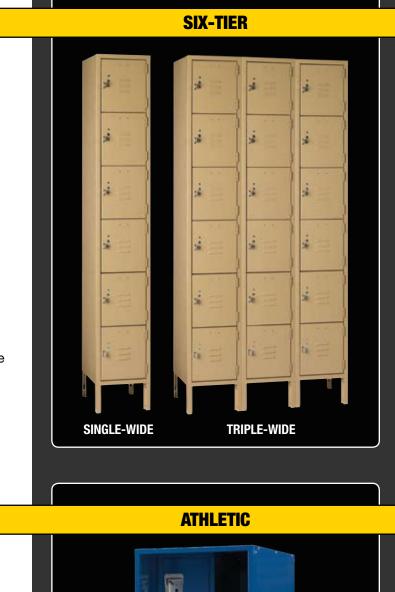

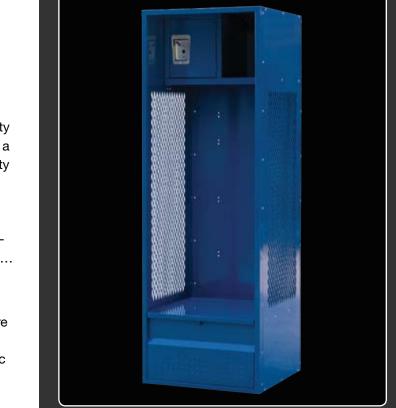

BENCHES



LOCKER BENCHES

Hardwood bench seats are available with painted steel pedestals for anchoring to floor or aluminum pedestals and rubber feet for movable benches.



SLOPING HOOD

Prevent accumulations of dirt and debris on the tops of lockers. Sloping tops offer easy access for cleaning. Our kit comes complete with all required components. (Packed three to a box.)

72" W X 12" D
72" W X 15" D
72" W X 18" D

LOCKS & NUMBER PLATES



COMBINATION LOCK

Double reinforced construction with stainless steel outer case and cold-rolled steel inner case. Nickel plated hardened steel shackle resists rust. Three-number dialing features an automatic scrambling feature to prevent reopening of lock. Standard black dial. #2051

COMBINATION LOCK WITH KEY CONTROL

Comes with master key access. Double reinforced construction with stainless steel outer case and coldrolled steel inner case. Nickel plated hardened steel shackle resists rust. Three-number dialing features an automatic scrambling feature to prevent reopening of lock. Standard black dial. #5251

BUILT IN KEY LOCK

High security, 5 pin tumbler cylinder for superior pick resistance. Easy to install and is designed to fit most lockers. Available with options that allow them to be keyed alike, master keyed and group keyed. Two keys are provided per lock. Installation registration assures key. #0171, #0171MK (Same as #0171 but can be opened with a master key, one master key included with every order.)

BUILT IN COMBINATION LOCK

Comes with end user registration and control charts provided to secure and simplify administration. Three digit combination. Offers five different, pre-set combinations. Locks are easily changed with the touch of a button. #0361

BUILT IN COMBINATION LOCK

Etched black figures on aluminum plate. #10829 (Pop rivets included; holes predrilled on door and plate.)

CLOSED BASES

Locker rooms and hallways take on a neater appearance and become much easier to keep clean with Closed Bases. Closed Bases also prevent dust and garbage build-up beneath the locker area. They quickly attach without tools.

Locker Front Bases (Packed 6 to a box.)

CFB-12 12" Wide CFB-15 15" Wide CFB-18 18" Wide

Locker End Bases (Packed 2 to a box. Only required at exposed ends)

CEB-12	12" Deep
CEB-15	15" Deep
CEB-18	18" Deep

SLOPING HOOD KITS



CLOSED BASES





SPECIFICATIONS





TIERS	WIDTH	DEPTH	HEIGHT	PRODUCT #	WIDTH	DEPTH
SINGLE	12"	12"	72"	S227-1	12"	12"
	12"	12"	72" (Assembled)	S227-1A	12"	12"
	12"	15"	72"	S257-1	12"	15"
	12"	15"	72" (Assembled)	S257-1A	12"	15"
	12"	18"	72"	S287-1	12"	18"
10	12"	18"	72" (Assembled)	S287-1A	12"	18"
	15"	18"	72"	S587-1	15"	18"
	15"	18"	72" (Assembled)	S587-1A	15"	18"
	18"	18"	72"	S887-1	18"	18"
	18"	18"	72" (Assembled)	S887-1A	18"	18"
DOUBLE	12"	12"	72"	D227-1	12"	12"
	12"	12"	72" (Assembled)	D227-1A	12"	12"
100 M	12"	15"	72"	D257-1	12"	15"
T	12"	15"	72" (Assembled)	D257-1A	12"	15"
	12"	18"	72"	D287-1	12"	18"
	12"	18"	72" (Assembled)	D287-1A	12"	18"
-	15"	18"	72"	D587-1	15"	18"
1	15"	18"	72" (Assembled)	D587-1A	15"	18"
	18"	18"	72"	D887-1	18"	18"
	18"	18"	72" (Assembled)	D887-1A	18"	18"
TRIPLE	12"	12"	72"	T227-1	12"	12"
	12"	12"	72" (Assembled)	T227-1A	12"	12"
1	12"	15"	72"	T257-1	12"	15"
	12"	15"	72" (Assembled)	T257-1A	12"	15"
	12"	18"	72"	T287-1	12"	18"
80	12"	18"	72" (Assembled)	T287-1A	12"	18"
	15"	15"	72"	T557-1	15"	15"
	15"	15"	72" (Assembled)	T557-1A	15"	15"
-	15"	18"	72"	T587-1	15"	18"
a	15"	18"	72" (Assembled)	T587-1A	15"	18"
	18"	18"	72"	T887-1	18"	18"
	18"	18"	72" (Assembled)	T887-1A	18"	18"
SIX	12"	12"	72"	6227-1	12"	12"
	12"	12"	72" (Assembled)	6227-1A	12"	12"
	12"	15"	72"	6257-1	12"	15"
4	12"	15"	72" (Assembled)	6257-1A	12"	15"
	12"	18"	72"	6287-1	12"	18"
	12"	18"	72" (Assembled)	6287-1A	12"	18"

		SPECIFICATIONS	
HEIGHT	PRODUCT #	TIERS	
72"	S227-3	SINGLE	
72" (Assembled)	S227-3A		
72"	S257-3		
72" (Assembled)	S257-3A		
72"	S287-3		
72" (Assembled)	S287-3A	10 10 10	
72"	S587-3		
72" (Assembled)	S587-3A		
72"	S887-3		
72" (Assembled)	S887-3A		
72"	D227-3	DOUBLE	
72" (Assembled)	D227-3A		
72"	D257-3	E E	
72" (Assembled)	D257-3A		
72"	D287-3		
72" (Assembled)	D287-3A		
72" 70" (Assessed to al)	D587-3		
72" (Assembled) 72"	D587-3A D887-3		
72" (Assembled)	D887-3A		
72"	T007 0		
72 72" (Assembled)	T227-3 T227-3A	TRIPLE	
72 (Assembled) 72"	T257-3		
72" (Assembled)	T257-3A	重重重	
72"	T287-3		
72" (Assembled)	T287-3A		
72"	T557-3	<u> </u>	
72" (Assembled)	T557-3A		
72"	T587-3	0 0 0	
72" (Assembled)	T587-3A	a a a	
72"	T887-3		
72" (Assembled)	T887-3A		
72"	6227-3	SIX	
72" (Assembled)	6227-3A	The second second	
72"	6257-3		
72" (Assembled)	6257-3A	4 4 4	
72"	6287-3		
72" (Assembled)	6287-3A	A A A	
		-	
		1 × = 1 × = 1 × = 1	

SPECIFICATIONS

LOCKER

ATHLETIC

T



	DIMENSIONS	FEATURES	PRODUCT #
	24"W X 18"D X 72"H	Locker Locker & Security Box Locker & Foot locker Locker, Security Box & Footlocker	A-241872 ASB-241872 AFL-241872 ASBFL-241872
	24"W X 21"D X 72"H	Locker Locker & Security Box Locker & Foot locker Locker, Security Box & Footlocker	A-242172 ASB-242172 AFL-242172 ASBFL-242172
	24"W X 24"D X 72"H	Locker Locker & Security Box Locker & Foot locker Locker, Security Box & Footlocker	A-242472 ASB-242472 AFL-242472 ASBFL-242472
	33"W X 18"D X 72"H	Locker Locker & Security Box Locker & Foot locker Locker, Security Box & Footlocker	A-331872 ASB-241872 AFL-241872 ASBFL-241872
	33"W X 21"D X 72"H	Locker Locker & Security Box Locker & Foot locker Locker, Security Box & Footlocker	A-332172 ASB-242172 AFL-242172 ASBFL-242172
	33"W X 24"D X 72"H	Locker Locker & Security Box Locker & Foot locker Locker, Security Box & Footlocker	A-332472 ASB-242472 AFL-242472 ASBFL-242472

LIFETIME LIMITED WARRANTY

Lightning Lockers shall warrant their locker for the life of the product. Warranty shall include all defects in material and workmanship, excluding finish, vandalism, and improper installation.

Warranty covers original owner and is non-transferable.



Lightning Plus Collection HEAVY DUTY METAL LOCKER

PART 1: GENERAL

1.01 Work Included

A. The metal lockers shall be powder-coated steel lockers as manufactured by Lightning Metal Lockers, Toledo, Ohio.

B. Furnish all labor and materials for completion of work in this section as shown in the approved drawings and specified herein

PART 2: PRODUCT

2.01 Material – All major steel parts of lockers and locker benches shall be of mild, cold-rolled, commercial quality steel.

2.02 Finish – All material shall be power washed and phosphate treated for maximum finish color adhesion. All components shall be finished with a 2 mm hybrid epoxy/ polyester powder electrostatically applied to ensure uniform thickness and baked to cure.

2.03 Construction – All metal lockers shall be built on a unit princip with common intermediate uprights separating units.

2.04 Door Frames – Shall be 16-gauge formed in a channel shape Vertical members shall have additional flange to provide a continuo door strike. Cross frame members shall also be 16-gauge channel shaped, including intermediate cross frames on Double and Triple-Tier metal lockers.

2.05 Doors – Shall be 16-gauge channel shaped on both the lock and hinge side, with angle formations across the top and bottom. 15"-wide and wider Single-Tier metal locker doors shall have a 16-gauge, full-height reinforcement channel. Doors shall be louvere for required ventilation. Single, Double and Triple-Tier doors shall have o set of louvers top and bottom of door. Six-Tier doors shall have o set of louvers located in the center of each door.

2.06 Body – Tops, bottoms, sides, backs and shelves shall be 24-gauge. Rivet spacing shall not exceed 9"o.c.

2.07 Hinges – Shall be full-length, 16-gauge, continuous piano typeriveted to both door and frame.

2.08 Handles – Shall be one-piece, 20-gauge, deep-drawn, stainless steel cup designed to accommodate locks.

2.09 Latching – Single, Double and Triple-Tier metal lockers shall have an 11-gauge frame hook secured to the frame. The frame sha have a padlock hasp protruding through the recessed handle. A rubber silencer shall be firmly secured to the frame at two locations

2.10 Interior Equipment – Single-Tier metal lockers 48"or higher shall have a shelf. If they are less than 18" deep, metal locker shall have two wall hooks. Single and Double-Tier metal clothes lockers 18" deep or greater shall have a coat rod in addition to two wall hooks. Triple and Six-Tier metal lockers do not have hooks.

2.11 Number Plates – Each metal locker shall have a polished aluminum number plate riveted to door face with black numerals $\frac{1}{2}$ "high.

2.12 Color – Doors and exposed body parts shall be Lightning Locker standard #01 Tan. Non-exposed body parts shall be finishe in #01 Tan. Additional colors available with manufactured lead time

2.13 Assembly – All metal locker components shall be assembled by use of rivets.

PART 3: EXECUTION

3.01 Installation – Metal lockers shall be installed in accordance with Lightning Lockers' installation instructions and shall be level and plumb with flush surfaces, and rigid attachment to anchoring surfaces.

Lifetime Guarantee: Products are guaranteed to be free from defe in workmanship and material for the lifetime of the product. Any products returned under this guarantee will be repaired or replaced no charge. Guarantee does not cover abuse or neglect.

SPECIFICATIONS

	Lightning Plus Collection
	ALL WELDED WITH DIAMOND PERFORATED SIDES AND DOORS
	PART 1: GENERAL
	1.01 Work Included
	A. The lockers shall be powder-coated by steel as by Lightning Lockers, Toledo, Ohio.
n.	B. Furnish all labor and materials for completion of work in this section as shown in the approved drawings and specified herein.
	PART 2: PRODUCT
j	2.01 Material – All major steel parts shall be of mild cold-rolled commercial quality steel.
	2.02 Finish – All materials shall be power washed and phosphate treated for maximum finish color adhesion. All components shall be finished with a 2 mm hybrid epoxy/polyester powder, electrostatically applied to ensure uniform thickness and baked to cure.
ple e. ous	2.03 Fabrication – Fabricate lockers square, rigid and without warp. Metal shall be flat and free of distortion. Lockers shall be pre-assembled of welded construction. All welds shall be free of burrs. Grouping shall be the most practical that conforms to the job requirement. No bolts, nuts or rivets shall be allowed in the assembly of main locker groups. Each locker group shall be securely welded into a one piece structure.
	2.03 Construction – All lockers shall be built on a unit principle with common intermediate uprights separating units.
ed	2.04 Door Frames – Shall be 16-gauge formed in a channel shape. Vertical members shall have additional flange to provide a continuous door strike. Cross frame members shall also be 16-gauge channel shaped, including intermediate cross frames on double and
JIIE .	Triple-Tier lockers.
e	2.05 Doors – Shall be 14-gauge, channel shaped on both the lock and hinge side, with angle formations across the top and bottom. 15" wide and wider Single-Tier locker doors shall have a 16-gauge full height reinforcement channel. Doors shall be Diamond Perforated for required ventilation.
	2.06 Body – Tops, bottoms, sides, backs and shelves shall be 16-gauge.
all	2.07 Hinges – Shall be full length 16-gauge continuous piano type riveted to both door and frame.
s.	2.08 Handles – Shall be one-piece 20-gauge deep drawn stainless steel cup designed to accommodate locks.
i	2.09 Latching – Single, Double and Triple-Tier lockers shall have an 11-gauge frame hook secured to the frame. The frame shall have a padlock hasp protruding through the recessed handle. A rubber silencer shall be firmly secured to the frame at two locations.
	2.10 Interior Equipment – Single-Tier lockers 48" or higher shall have a shelf. If under 18" deep, locker shall have two wall hooks. Single and Double-Tier lockers 18" deep or more shall have a coat rod in addition to two wall hooks. Triple and Six-Tier lockers do not receive hooks.
ed e.	2.11 Number Plates – Each locker shall have a polished aluminum number plate riveted to the door face with black numerals $\frac{1}{2}$ " high.
	2.12 Color – Doors and exposed body parts shall be Lightning Locker standard #01 Tan. Non-exposed body parts shall be finished in #01 Tan. Additional colors available with manufactured lead time.
	2.13 Assembly – All locker components shall be assembled by use of rivets.
	PART 3 – EXECUTION
ects	3.01 Installation – Lockers shall be installed in accordance with Lightning Locker's installation instructions and shall be level and plumb with flush surfaces and rigid attachment to anchoring surfaces.
d at	Lifetime Guarantee: Products are guaranteed to be free from defects in workmanship and material for the lifetime of the product. Any products returned under this guarantee will be repaired or replaced at no charge. Guarantee does not cover finish, abuse or neglect.

Illustrations and descriptions herein are applicable to production as of the date of this catalog.

The manufacturer reserves the right to make changes and improvements in designs and dimensions at any time.

[©] The Butler/ James Company Ltd. dba Lightning Lockers



LIGHTNING LOCKERS

Nobody else in the industry offers a locker with our specifications as their standard locker. This is why our locker comes with a Lifetime Warranty. Remember, our whole business is lockers. Our Single, Double and Triple-Tier lockers come with a full length piano hinge and a Zero-Maintenance welded latch system as standard equipment, not expensive upgrades. Why? Research has determined that nearly every locker failure is the result of a failed hinge or a malfunctioning latch. With this in mind we fortified these vulnerable areas and created an affordable standard locker that lasts virtually forever and requires an absolute minimum of maintenance.

> Lightning Lockers 1119 Water Street Toledo, Ohio 43604

Telephone: 1-800-497-6895 Fax: 419-725-1915 www.LightningLockers.com