



# LOCKER

## ASSEMBLY INSTRUCTIONS



# **GENERAL INSTRUCTIONS**

## **Thank You For Purchasing from Lightning Lockers LLC.**

Read all assembly instructions carefully before assembling.

Refer to Packing List to assure proper material quantities.

Inspect all contents to ensure all parts are included and undamaged.

The following tool is required for assembly and is not included:

- 3/8" Wrench


### **Hardware List**

- Nuts/Bolts (Do not tighten securely until completely assembled)
- Hooks
- Coat Rods (Only for Lockers 18" or deeper)

### **Caution**


The person assembling the locker is responsible for properly installing all material and hardware as specified in these instructions.

Please tighten all hardware securely.

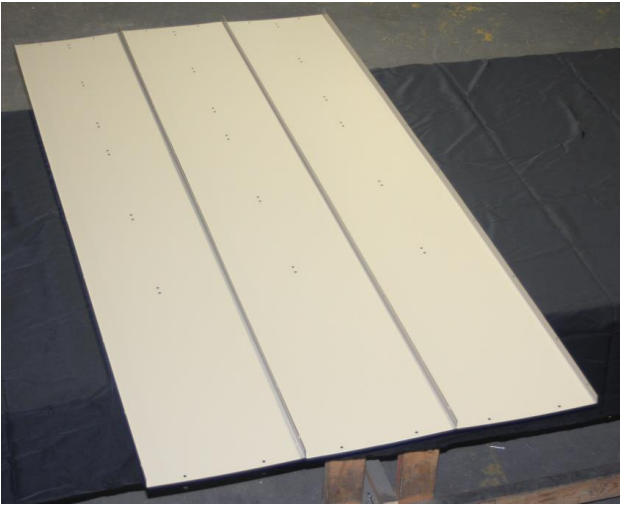

**1. Lie backs on a flat surface with flanges facing upwards.**


**NOTE: The holes in the center of the back closest to the edge will be the top of the locker.**

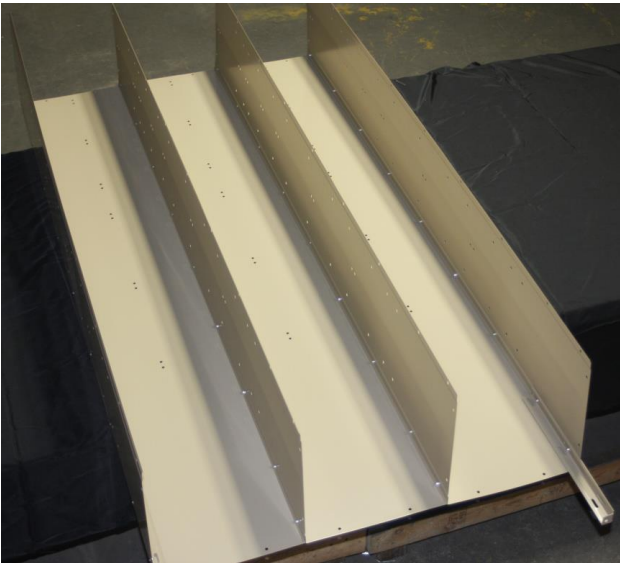

**2. Line up the holes in the center of the side with the center of the back and attach sides with hardware provided.**



**3. Attach 2 legs at each exterior corner of locker as shown.**

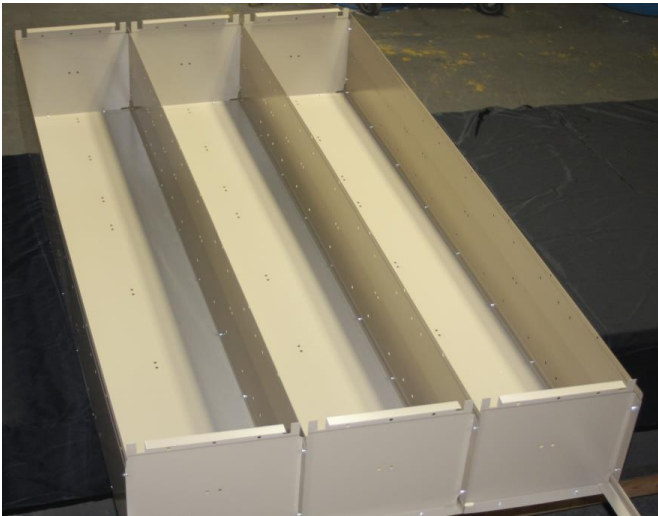

**4. Attach 6 Top / Bottoms to sides and backs with flange facing down.**



**5. Attach shelves.**

**Note: There are multiple locations to attach the shelf. Use the ones that best fit the application.**



**6. Attach hooks as shown.**

**Note: Lockers 18" or deeper will have coat rod hooks and coat rods.**



**7. Attach doors as shown.**

**Note: If adjoining multiple banks leave out the nuts and bolts in the second hole from the top and second hole from the bottom of the outside of the locker. This allows you to attach multiple banks together.**